

MODEL :

PNP-ES-**5-10-24**  
 └ Voltage(V)  
 └ Force(N)  
 └ Stroke(mm)




MODEL :

PNP-ES-5-10-24  
**PNP-ES-5-44-24**

### ELECTRIC SLIDER SPECITICATION

#### 1. MECHAMCAL DIMENSTONS

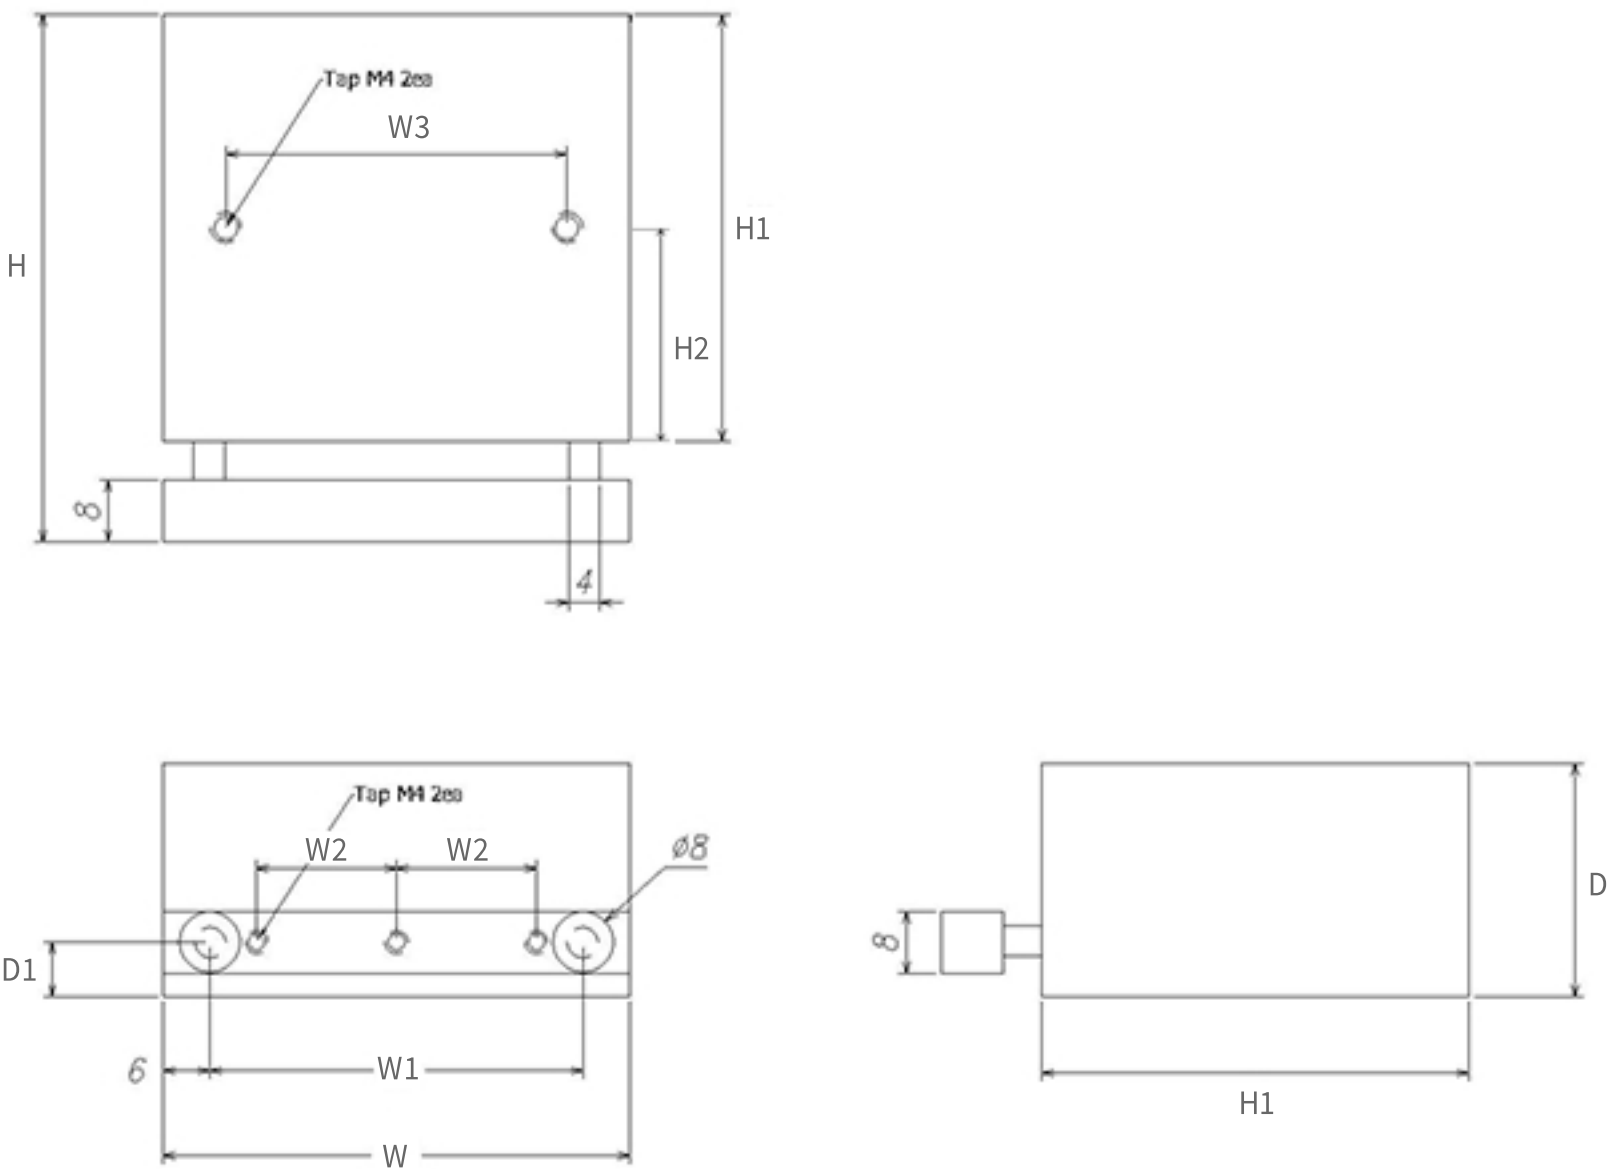

모 델	W	W1	W2	W3	H	H1	H2	D	D1
PNP-ES-5-10-24	60	48	18	40	68	55	32	30	7
<b>PNP-ES-5-44-24</b>	<b>80</b>	<b>60</b>	<b>24</b>	<b>50</b>	<b>112</b>	<b>90</b>	<b>52</b>	<b>40</b>	<b>10</b>

#### 2. ELECTRIC SPECIFICATION

구 분	사 양	비 고
Stroke	5mm	규격 외 Option
Force	<b>PNP-ES-5-10-24 7N</b> <b>PNP-ES-5-44-24 44N</b>	
정격전압	24V(1%이내)	
동작전류	<b>PNP-ES-5-10-24 1.8A</b> <b>PNP-ES-5-44-24 3.0A</b>	통전시간 200ms
제어방식	Edge Trigger	L→H ON (24V) H→L OFF (24V)
케이블길이	1M	
Lite expecfanccy	100k cycles operetions	

#### 3. CONNECTION

배 선	색 상	기 능
1	갈색	+V(24V)
2	청색	0V
3	흑색	제어(24V)
4	-	-